

75 WATT LT TRIPLE SERIES DC/DC CONVERTERS



Features

- Small size 2.4" x 2.28" x 0.55"
- Excellent thermal performance with metal baseplate
- Non-latching over voltage shutdown
- Pulse-by-pulse current limiting, short circuit foldback
- Over-temperature protection
- Auto-softstart
- Low noise
- Constant frequency for normal operation
- 2:1 input voltage range
- Positive logic primary remote On/Off
- Very low temperature coefficient
- Water Washable
- Trimmable output voltages
- Low cost
- 5 Year Warranty

Description

The LT Triple Series DC/DC family provides three independent and precisely regulated low output voltage converters in one package reducing cost and saving board space. The LT Series meets rigorous requirements in an industry standard 1/2 brick package, and is well suited for telecom and industrial applications.

All three outputs are rated for a maximum of 10 Amps, thus providing many possible output load combinations with a total output power of 75 Watts. The remote trim function on each output can be used to compensate for voltage drops between the converter and the load at higher currents.

The LT Series includes a primary remote on/off for power conservation. The LT package features threaded-through holes to allow for easy mounting or the addition of a heat sink for extended temperature operation.

Selection Chart				
Model	Input Range VDC		Vout VDC	Iout ADC* (All outputs)
	Min	Max		
24T5.3.2LT	18	36	5, 3.3, 2.5	10
24T3.2.1R8LT	18	36	3.3, 2.5, 1.8	10
24T3.2.1R5LT	18	36	3.3, 2.5, 1.5	10

* The output currents are the maximum ratings of each of the outputs. It is up to the user to keep the total power output at or below the 75 Watt rating of the package.

** For other output voltages and 48 Volt input models contact the factory.



75 WATT LT TRIPLE SERIES DC/DC CONVERTERS



Unless otherwise stated, these specifications apply for baseplate temperature $T_B=23\pm 2^\circ\text{C}$, nominal input voltage, and rated full load. (1) (2)

Input Parameters				
Model		24T5.3.2LT	24T3.2.1R8LT 24T3.2.1R5LT	Units
Voltage Range	MIN TYP MAX		18 24 36	VDC
Input Overvoltage (100 ms)	MAX		50	VDC
Input Ripple Rejection (120Hz)	TYP		50	dB
Undervoltage Lockout			Yes	
Input Reverse Voltage Protection			Yes	
Input Current	No Load 100% Load	TYP TYP	12 3.6	mA A
Inrush Current	MAX		0.5	A ² s
Reflected Ripple, 12 μ H Source Impedance (4)	TYP		20	mA P-P
Efficiency	TYP	81	77	%
Switching Frequency	TYP		360	kHz
Recommended Fuse			(3)	AMPS

Notes:

- (1) Refer to the CALEX Application Notes for the definition of terms, measurement circuits, and other information.
- (2) Full Load is defined as the main output operating at 10 Amps. The Auxiliary outputs are equally loaded to bring output power to 75 Watts, or loaded to 10 Amps maximum on each.
- (3) This unit is not fused and needs to be fused by the user. Refer to the CALEX Application Notes for information on fusing. For inrush current, refer to the specifications above.
- (4) Place a 33 μ F capacitor between the two "Input" pins. Then place the current sensor in series with 12 μ H inductor between the capacitor and the source. The reflected ripple current is measured over a 5 Hz to 20 MHz bandwidth. Noise should be minimized in the measurement.
- (5) Noise is measured per the CALEX Application Notes. Output noise is measured with a 10 μ F tantalum capacitor in parallel with a 0.1 μ F ceramic capacitor connected across the output to CMN. Measurement bandwidth is 0-20 MHz.
- (6) Optimum performance is obtained when this power supply is operated within the minimum to maximum load specifications. No damage to the module will occur when the output is operated at less than minimum load, but the output voltage may contain a low frequency component that may exceed output noise specifications. At no load the converter's Vo1 output voltage may fall out of regulation, typically rising to the OVP limit. A load current of between 0.5% to 1% of maximum rated load on any of the outputs will usually suffice to bring Vo1 within regulation.
- (7) Load Transient Recovery Time is defined as the time for the output to settle from a 50 to 75% or 25% step load change to a 1% error band of output voltage (rise time of step = 2 μ s).
- (8) Load Transient Overshoot is defined as the peak overshoot during a transient as defined in the Note 7 above.
- (9) Load Regulation is defined as the output voltage change when changing load current from maximum to minimum. The voltage is measured at the output pin.
- (10) Most switches would be suitable for logic ON/OFF control. In case there is a problem, you can make the following estimations and then leave some margin.
When open collector is used for logic high, "Open Circuit Voltage at ON/OFF Pin", "Output Resistance" and "External Leakage Current Allowed for Logic High" are used to estimate the high impedance requirement of open collector.
When switch is used for logic low, "Open Circuit Voltage at ON/OFF Pin", "Output Resistance" and "LOW Logic Level" are used to estimate the low impedance requirement of the switch.
- (11) Thermal impedance is tested with the converter mounted vertically and facing another printed circuit board 1/2 inch away. If converter is mounted horizontally with no obstruction, thermal impedance is approximately 7°C/W.
- (12) Minimum load is defined as 10% of maximum load. Calnex Mfg. Co. Inc. does not guarantee performance for loads less than the minimum. Loads less than the minimum shall not damage the unit.
- (13) When an external ON/OFF switch is used, such as open collector switch, logic high requires the switch to be high-impedance. Switch leakage currents greater than 10 μ A may be sufficient to trigger the ON/OFF to the logic-low state.
- (14) Water Washability - Calnex DC/DC converters are designed to withstand most solder/wash processes. Careful attention should be used when assessing the applicability in your specific manufacturing process. Converters are not hermetically sealed.
- (15) Torque fasteners into threaded mounting inserts at 12 in.oz. or less. Greater torque may result in damage to unit and void the warranty.



75 WATT LT TRIPLE SERIES DC/DC CONVERTERS



Unless otherwise stated, these specifications apply for baseplate temperature $T_B=23\pm 2^\circ\text{C}$, nominal input voltage, and rated full load. (1) (2)


Output Parameters (VO1)						
Model		24T5.3.2LT		24T3.2.1R8LT 24T3.2.1R5LT		Units
Output Voltage		5		3.3		VDC
Output Voltage Setpoint Accuracy	MAX	± 1				%
Turn On Overshoot	TYP	0				%
Temperature Coefficient	TYP	0.003				%/ $^\circ\text{C}$
	MAX	0.01				
Noise & Ripple (5)	TYP	50		33		mV P-P
	MAX	100		66		
Load Current (6) (12)	MIN	1.0				A
	MAX	10.0				
Load Transient Overshoot (8)	TYP	4				%
Load Transient Recovery Time (7)	TYP	100				μSec
Load Regulation (9) Min-Max Load	TYP	0.5				%
	MAX	1				
Line Regulation $V_{in} = \text{Min-Max}$	TYP	0.1				%
	MAX	0.5				
Overvoltage Protection (OVP) Threshold OVP Type - Non-latching Open Loop Overvoltage Clamp	TYP	130				%
Output Current Limit $V_{out} = 90\%$ of $V_{out-nom}$	TYP	120				%
Output Short Circuit Current $V_{out} = 0.25\text{V}$	TYP	175				%

Output Parameters (VO2, VO3)							
		(VO2)		(VO3)			
Model		24T5.3.2LT	24T3.2.1R8LT 24T3.2.1R5LT	24T5.3.2LT	24T3.2.1R8LT	24T3.2.1R5LT	Units
Output Voltage		3.3	2.5	2.5	1.8	1.5	VDC
Output Voltage Setpoint Accuracy	MAX	± 3.0					%
Turn On Overshoot	TYP	0					%
Temperature Coefficient	TYP	0.02					%/ $^\circ\text{C}$
	MAX	0.05					
Noise & Ripple (5)	TYP	33	25	25	18	15	mV P-P
	TYP	66	50	50	36	30	
Load Current (6)	MIN	0.2					A
	MAX	10.0					
Load Transient Overshoot (8)	TYP	4					%
Load Regulation (9) Min-Max Load	TYP	0.5					%
	MAX	1.6					
Line Regulation $V_{in} = \text{Min-Max}$	TYP	0.5					%
	MAX	1					

75 WATT LT TRIPLE SERIES DC/DC CONVERTERS



General Specifications			
All Models	Units		
Primary Remote ON/OFF Function			
HIGH Logic Level for ON	MIN	3.0	VDC
External Leakage Current Allowed for Logic High (13)	MAX	10	μA
Input Diode Protection Voltage	MAX	50	VDC
LOW Logic Level or Tie ON/OFF Pin to -INPUT	MAX	1.0	VDC
Sinking Current for Primary Logic Low	MAX	500	μA
Open Circuit Voltage at Primary ON/OFF Pin (10)	TYP	2.3	VDC
Output Resistance (10)	TYP	3	k Ω
Idle Current (Module is OFF)	TYP	2	mADC
Turn-on Time to 1% error	TYP	20	mSec
Remote ON/OFF Logic	HIGH - Module ON LOW - Module OFF		
Output Voltage Trim			
Trim Range	MIN MAX	-5 +5	% of Vout
Input Resistance	TYP	10	kΩ
Open Circuit Voltage	TYP	2.5	V
Trim Limit			
Maximum Output Voltage	MAX	105	% of Vout
Isolation			
Input to Output Isolation 10μA Leakage	MAX	700	VDC
Input to Output Resistance	MIN	10	MΩ
Input to Output Capacitance	TYP	1800	pF
Environmental			
Calculated MTBF, Bellcore Method 1, Case 1	>1,000,000		Hr
Baseplate Operating Temperature Range	MIN MAX	-40 100	°C
Storage Temperature	MIN MAX	-40 120	°C
Thermal Impedance (11)	TYP	7	°C/W
General			
Unit Weight	TYP	4/114	oz/g
Chassis Mounting Kit	MS25		
Case Dimension	2.4" x 2.28" x 0.55"		
Agency Approvals	Designed to meet UL60950		

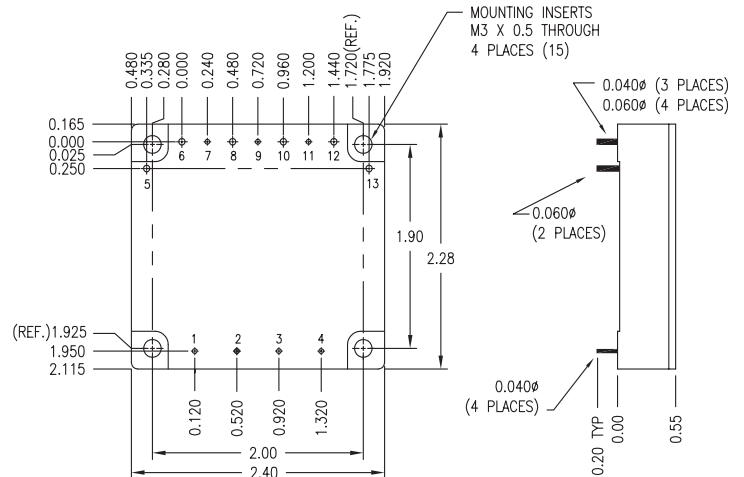

TOLERANCE: ALL DIMENSIONS ARE TYPICAL IN INCHES UNLESS OTHERWISE NOTED:

X.XX	±0.020
X.XXX	±0.005

Pin	Function	Pin	Function
1	CASE	8	- V1
2	- INPUT	9	V1 TRIM
3	+INPUT	10	+ V1
4	ON/OFF	11	+V2 TRIM
5	- V3	12	+ V2
6	+V3	13	- V2
7	V3 TRIM		